ELEVATION CERTIFICATE

FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR).

Instructions for completing this form can be found on the following pages.

	FOR INCHIDANCE COMPANY LIGH							
BUILDING OWNER'S NAME	FOR INSURANCE COMPANY USE POLICY NUMBER							
Est. of Rob								
STREET ADDRESS (Including Ap	5 POINT	Number) OR P.O. I	ROUTE AND BOX NUMBER		COMPANY NAIC NUMBER			
OTHER DESCRIPTION (Lot and LOT 430)	Block Numbers, etc.) BLOCK	479						
UPPER T	OWNSHIP			STATE	ZIP CODE			
SECTION B FLOOD INSURANCE RATE MAP (FIRM) INFORMATION								
Provide the following from the proper FIRM (See Instructions):								
1. COMMUNITY NUMBER	2. PANEL NUMBER	3. SUFFIX	3. SUFFIX 4. DATE OF FIRM INDEX 5		6. BASE FLOOD ELEVATION			
340159	0003	B	OI JUNE 1984	ALO	(in AO Zones, use depth)			
7. Indicate the elevation datum system used on the FIRM for Base Flood Elevations (BFE): NGVD '29 Other (describe on back) 8. For Zones A or V, where no BFE is provided on the FIRM, and the community has established a BFE for this building site, indicate the community's BFE: feet NGVD (or other FIRM datum—see Section B, Item 7)								
	SECTIO	NC BUILDI	NG ELEVATION INFORM	ATION	·			
(b). FIRM Zones V1-V30, V the selected diagram, i (c). FIRM Zone A (without below (check one) (d). FIRM Zone AO. The fl one) the highest grade level) elevated in accord. Indicate the elevation datu under Comments on Page the FIRM [see Section Englation under Comments on Page 1 (a).	t NGVD (or other FIRITIES, and V (with BFE). It is at an elevation of BFE). The floor used the highest grade adjoor used as the refere adjacent to the building dance with the commum system used in dee 2). (NOTE: If the end, Item 7], then conversion Page 2.)	M datum—see The bottom of the	Section B, Item 7). If the lowest horizontal structure feet NGVD (or other FIRM are level from the selected wilding. In the selected diagram is depth number is available ain management ordinance above reference level elevel are to the datum system use to the datum system use.	uctural member of datum—see Se diagram is feet above, is the building's e? Yes I wations: May be added on the FIRM a	ction B, Item 7). defect above or ove or below (check is lowest floor (reference) No Unknown D'29 Other (describe)			
4. Elevation reference mark used appears on FIRM: Yes X No (See Instructions on Page 4)								
5. The reference level elevation is based on: X actual construction construction drawings (NOTE: Use of construction drawings is only valid if the building does not yet have the reference level floor in place, in which case this certificate will only be valid for the building during the course of construction. A post-construction Elevation Certificate will be required once construction is complete.)								
S. The elevation of the lowest grade immediately adjacent to the building is: 9 feet NGVD (or other FIRM datum-see Section B, Item 7).								
SECTION D COMMUNITY INFORMATION								
I. If the community official re is not the "lowest floor" as floor" as defined by the or 2. Date of the start of constru	dinance is:	inity's noodpla	ations specifies that the re in management ordinance GVD (or other FIRM datun	, the elevation of	f the building's "lowest			


SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1–A30, AE, AH, A (with BFE),V1–V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features—If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

CERTIFIER'S NAME	LICENSE NUMBER (or Affix Seal)						
CARL TOTTEN	23936						
TITLE	COMPANY NAME						
LAND SURVEYOR	CARL	TOTTEN	ASSOCIATES	INC.			
ADDRESS	CITY		STATE	ZIP			
PO BOX 217	ESTELL M.	ANOR	NJ	08319			
SIGNATURE MICHAEL MICH	06 N	ATE DV 1997	PHONE 625	0143			
Copies should be made of this Certificate for: 1) co	ommunity official, 2) insura	ance agent/con	npany, and 3) building	owner.			
COMMENTS:							
				annan annan ann ann ann ann ann ann an a			

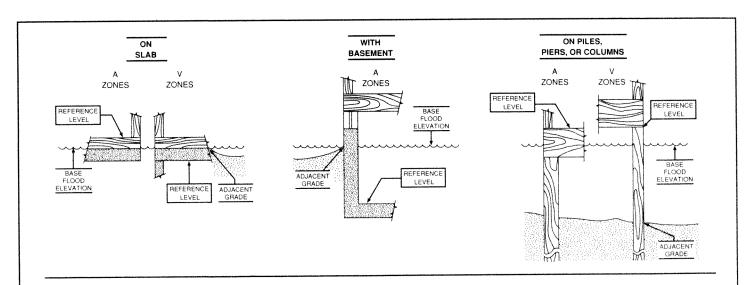

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.